

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				E	REVISED & REDRAWN PER 0720-0303-93	7-26-93	BB

REVISIONS

<b>AMP</b>	WIRE RANGE
	4 AWG STRANDED

**METRIOR**  
 DIMENSIONS LISTED IN MM [ INCHES ]

NOTE:  
 1. WIRE INSULATION DIA 9.40 [ .370 ] MAX

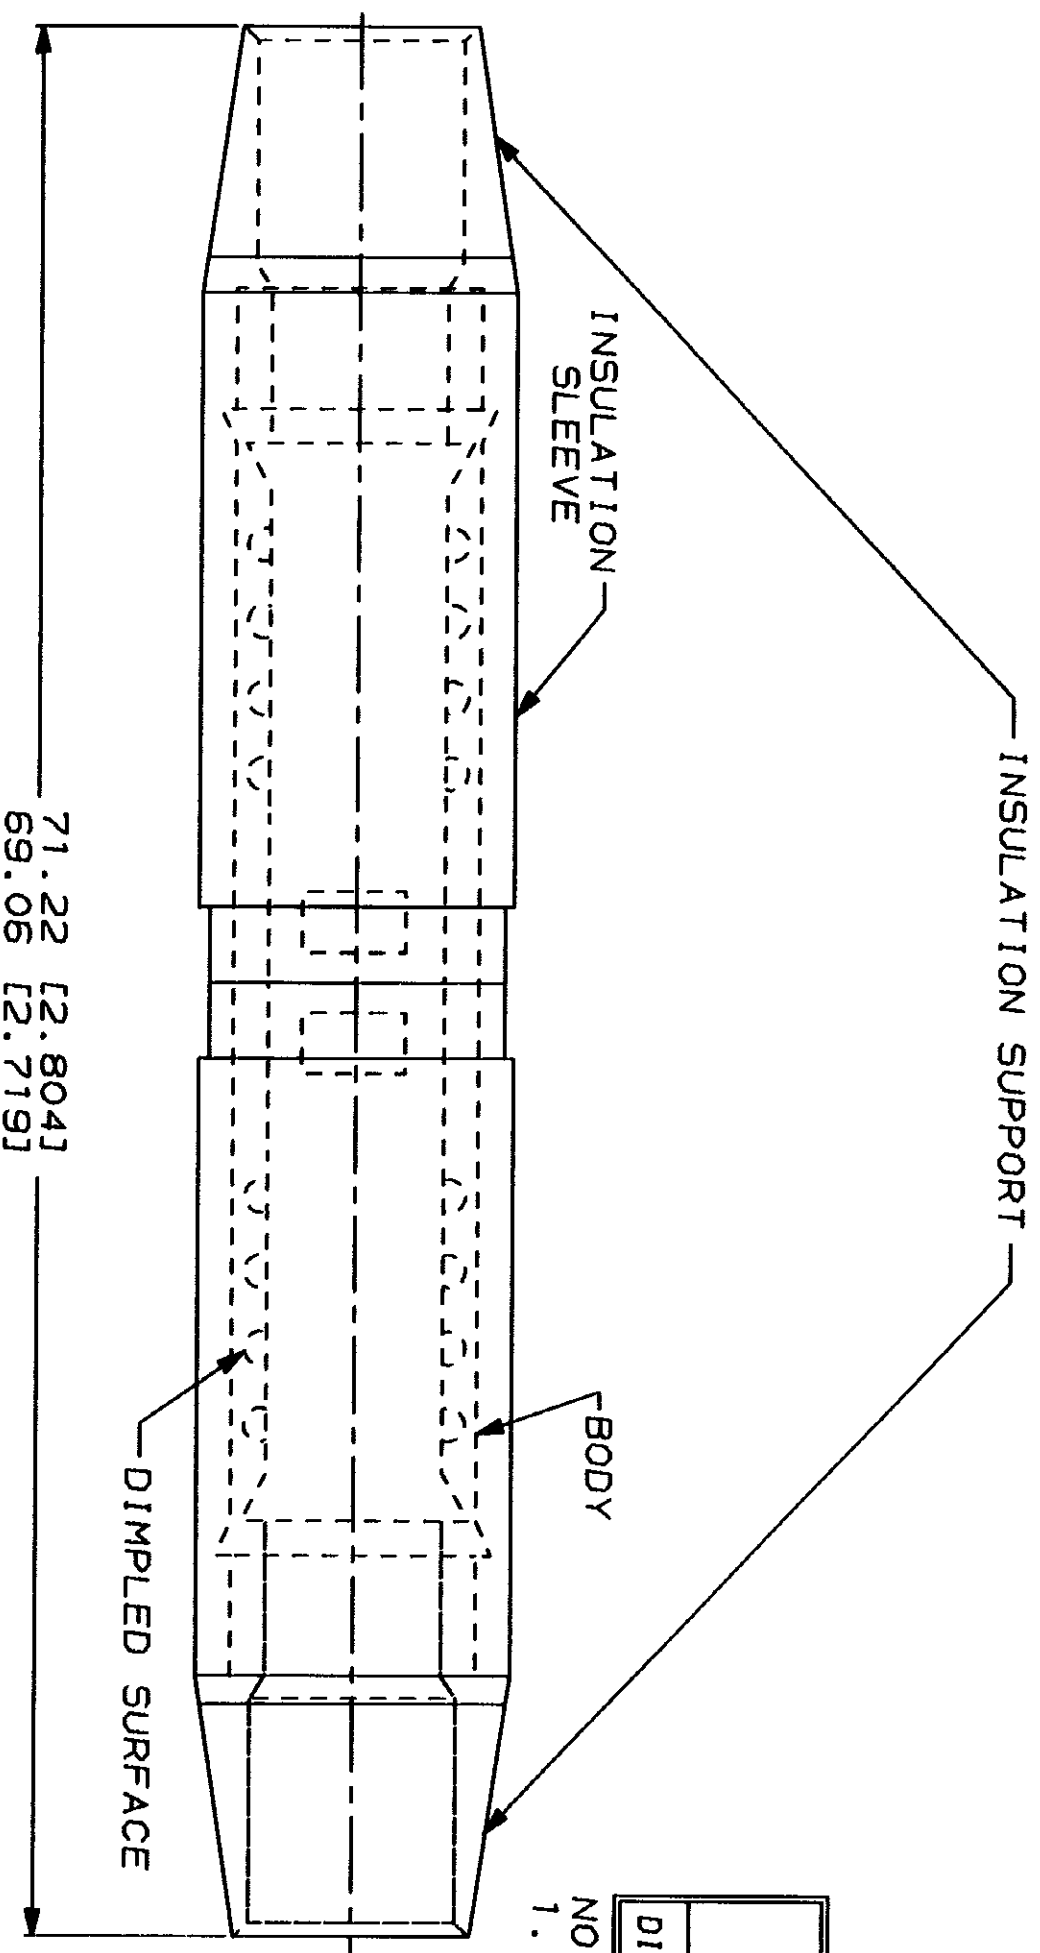

AMP INCORPORATED  
 CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	1-800-522-6752	PRODUCT INFORMATION CENTER
FOR APPLICATION	1-800-722-1111	TOOLING ASSISTANCE CENTER
TOOLING INFORMATION	1-800-526-5142	
FOR ORDER ENTRY		

MAX RECOMMENDED OPERATING TEMPERATURE:  
 105°C

VOLTAGE RATING:  
 600 V MAX

CIRCULAR MIL AREA:  
 16.77-26.65mm² [ 33,100-52,600 ]  
 STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT.  
 UNLESS SPECIFIED

TOLERANCES ON:  
 2 PLC DEC ± 0.20 [ .008 ]  
 3 PLC DEC ± . . .  
 ANGLES ± . . .

FINISH: TIN PLATE  
 PER MIL-T-10727

DR	7-26-93	S.S. GOLDEN
CHK	7-26-93	R. HERSEY
APPD	7-26-93	B. BLUE
APPD	7-26-93	M. BLIS
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		

QTY	100	LOOSE PC	324622
PACKAGE TYPE			PART NO

**AMP**

AMP Incorporated  
 Harrisburg, PA 17105-3608

NAME: SPlice, BUTT, SINGLE TO SINGLE, TERMINYL,  
 WIRE SIZE: 4 AWG

SIZE	CAGE CODE	DRAWING NO
B	00779	G=324622
SCALE	NTS	SHEET
		1 OF 1