


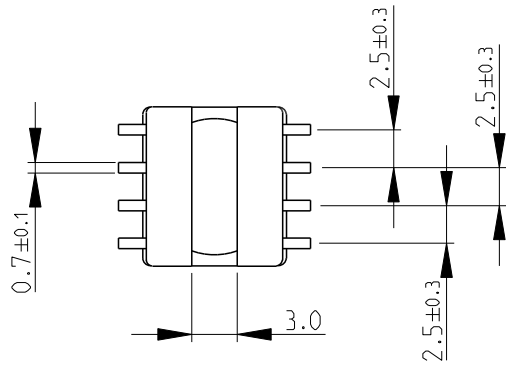



LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
		BA1	ECR-11-007268		07APR2011	PSK	AP

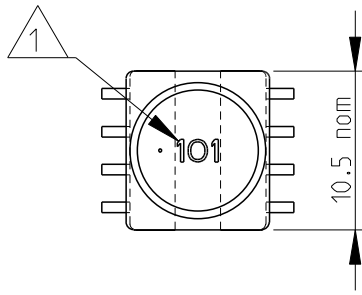

RECOMMENDED LAND PATTERN FOR INDUCTANCE VALUES 100 μH OR HIGHER

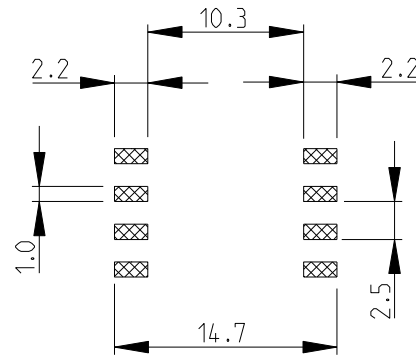


RECOMMENDED LAND PATTERN FOR INDUCTANCE VALUES 1.5 μH - 82 μH

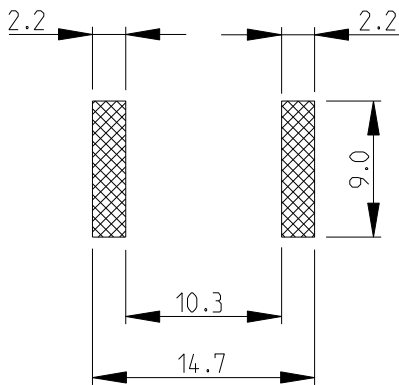

1 INDUCTANCE CODE

2 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3632 SERIES-SHIELDED SMD POWER INDUCTORS

RoHS Compliant




2008

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

BY -
© COPYRIGHT 2008

DIMENSIONS: mm	DWN SUBHASH.M	03-Sep-08	MATERIAL	-	FINISH	-
	CHK PRAKASH.S	03-Sep-08	 TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD STEPHEN.P	03-Sep-08				
0 PLC ± 0.2	PRODUCT SPEC	-	NAME SHIELDED SMD POWER INDUCTOR SERIES 3632B			
1 PLC ± 0.1	APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -	WEIGHT	-	A 4	00779	© = 1625813	-
3 PLC ± -	CUSTOMER DRAWING		SCALE	2:1	SHEET	1 OF 1
4 PLC ± -						REV BA1
ANGLES ± 5°						