



A  
B  
C  
D  
E  
F  
G  
H

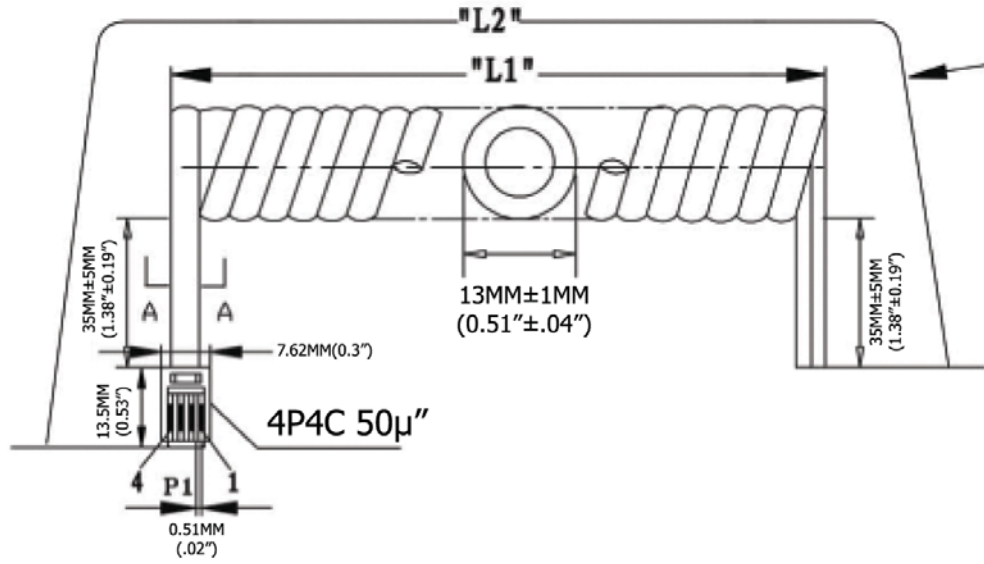

Extended length is with 500g of force

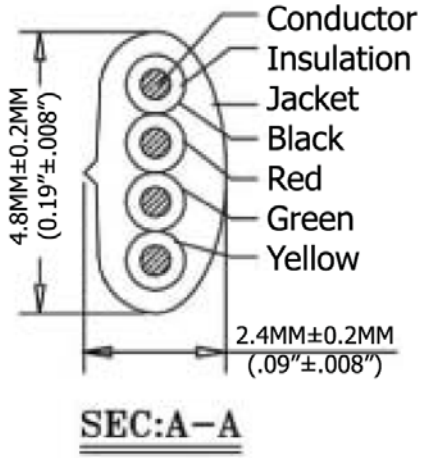

TERMINATION:

| P1 | COLOR  |
|----|--------|
| 1  | BLACK  |
| 2  | RED    |
| 3  | GREEN  |
| 4  | YELLOW |

| Extended Length ("L2")    | Typical Retracted Length ("L1") |
|---------------------------|---------------------------------|
| 84.0 Inches - 96.6 Inches | 18.5 Inches                     |
| 2,133.6MM-2,752.64MM      | 469.9MM                         |

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag



|           |       |  |  |  |          |          |          |  |
|-----------|-------|--|--|--|----------|----------|----------|--|
| Scale     | 1:1   |  |  |  |          |          | Name     | Item No.<br><b>AT-C-26-4/4/S-7-OE</b>  |
| TOLERANCE |       |  |  |  | Drawn    | 11.02.11 | Chappell |  |
| X.X       | ±0.40 |  |  |  | Approved |          |          | Title<br>NON-UL 26AWG (0.12X12)*4C, O.D.: 2.4*4.8MM,<br>Single Plug, 50µ" of contact plating, SILVER |
| X.XX      | ±0.25 |  |  |  |          |          |          |  |
| X.XXX     | ±0.15 |  |  |  |          |          |          | Drawing No.  |
| Angle     | ±3°   |  |  |  |          |          |          |  |
|           |       |  |  |  |          |          |          | Replace  |
|           |       |  |  |  |          |          |          |  |
|           |       |  |  |  |          |          |          | Sheet  |



A  
B  
C  
D  
E  
F  
G  
H