




# ADSL LINE TRANSFORMERS

## For Infineon ADSL CPE Chipsets



-  Matched to Infineon's Amazon ADSL chipset
-  Designed to meet IEC60950 supplementary insulation requirements at 250V working voltage
-  1500V Breakdown Isolation between windings

### Electrical Specifications @ 25°C — Operating Temperature -40°C to 85°C

Part Number		Turns Ratio		OCL Primary (mH ±10%)	THD @ 30kHz, (dB MAX)	Isolation Voltage (Vrms)
RoHS-5	RoHS-6	Line:TX	Line:RX			
BX2913L	BX2913LNL	4.2:1	2:1	1.4	-88	1500
-	BX2917LNL	3.8:1	1.9:1	0.2	-95	1500



NOTES: Transformers are shipped in trays, unless Tape & Reel packaging is specified by adding the suffix "T" to this part number (Ex: BX2913LT or BX2913LNLTL).

### Mechanical

### Schematic

#### BX2913L / BX2913LNL / BX2917LNL

#### SUGGESTED PAD LAYOUT

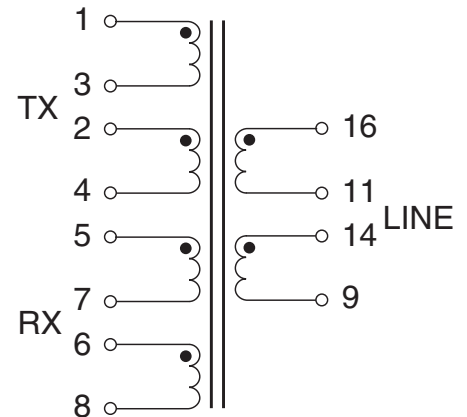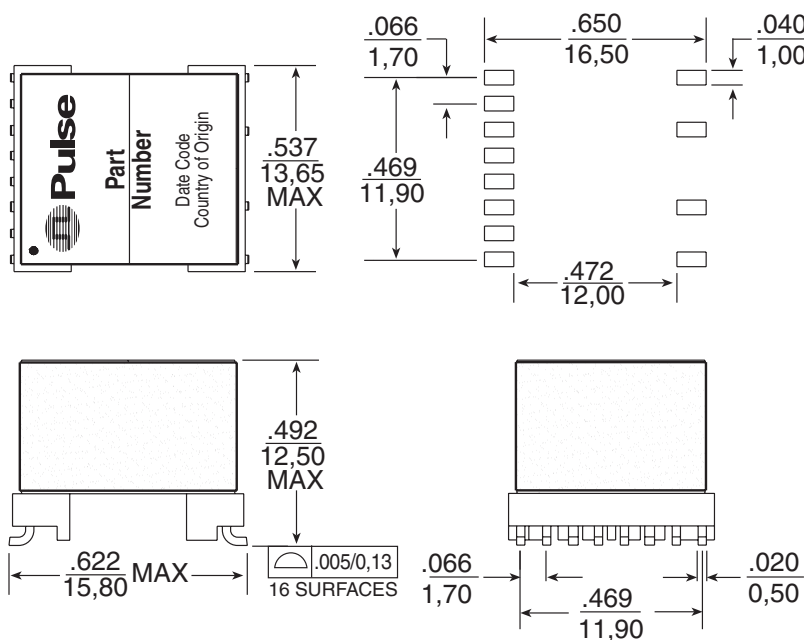

Weight ..... .6.5 grams  
 Tape & Reel ..... .150/reel  
 Tray ..... .60/tray

Dimensions: Inches  
 mm  
 Unless otherwise specified, all tolerances are ± .010 / 0.25

### For More Information:

#### Pulse Worldwide Headquarters

12220 World Trade Dr.  
 San Diego, CA 92128  
 U.S.A.

[www.pulseeng.com](http://www.pulseeng.com)

TEL: 858 674 8100

FAX: 858 674 8262

#### Pulse Europe

Einsteinstrasse 1  
 D-71083 Herrenberg  
 Germany

Tel: 49 7032 7806 116

Fax: 49 7032 7806 135

#### Pulse China Headquarters

No. 1  
 Industrial District  
 Changan, Dongguan  
 China

Tel: 86 769 85538070

Fax: 86 769 85538870

#### Pulse North China

Room 1503  
 XinYin Building  
 No. 888 YiShan Rd.  
 Shanghai 200233  
 China

Tel: 86 21 54643211/2

Fax: 86 21 54643210

#### Pulse South Asia

150 Kampong Ampat  
 #07-01/02  
 KA Centre  
 Singapore 368324

Tel: 65 6287 8998

Fax: 65 6280 0080

#### Pulse North Asia

No. 26  
 Kao Ching Rd.  
 Yang Mei Chen  
 Taoyuan Hsien  
 Taiwan, R. O. C.

Tel: 886 3 4641811

Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.

[www.pulseeng.com](http://www.pulseeng.com)

B889.B (10/06)